


Active 8" Studio Subwoofer




Packaging



Cardboard box dimensions (HxWxD):
520 x 400 x 480 mm / 20.47" x 15.75" x 18.90"
Total weight:
14 kg / 30.86 lb.

Frequency Response

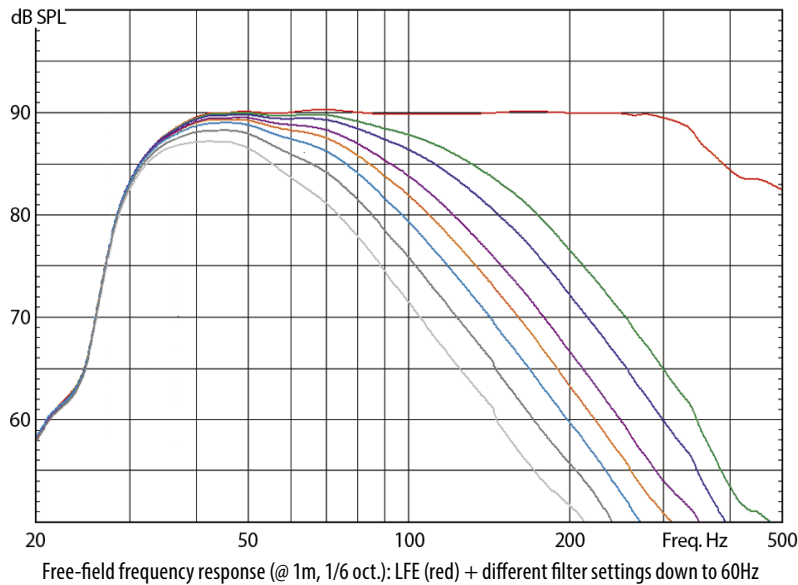

Specification Chart

Dimensions (WxHxD)	280 x 415 x 365 mm	Phase inversion	0°/180°	XLR in right	impedance 10kΩ
Dimensions (WxHxD)	11.06" x 16.34" x 14.37"	Switchable satellite filter	flat/80Hz	XLR in LFE	impedance 10kΩ
Free-field freq. range (-3dB)	33Hz - 300Hz	Variable subwoofer filter	60-140Hz + LFE	XLR out satellite left	impedance 10kΩ
Woofer	195mm/8"	LED brightness setting		XLR out satellite right	impedance 10kΩ
Maximum SPL @ 1m	105dB	Level lock dip switch		XLR out (LFE)	impedance 10kΩ
Number of amplifiers	1	Filter lock dip switch		Power consumption	
Output power	150W	Input level dip switch	+7dBu/+22dBu	Standby	< 1W
Protection	Limiter	Auto-standby dip switch		Full output	170VA
User settings		Connectors		Misc.	
System volume (Satellites & Sub)	-inf. - +6dB	RCA in (mono)	impedance 10kΩ	IR remote control	
Subwoofer volume	-inf. - +6dB	XLR in left	impedance 10kΩ	Weight	11.5 kg / 25.3 lb

Physical Data

